

# TRUCK CRANE

## TG-3600M

TG

### *JAPANESE SPECIFICATIONS*

CARRIER MODEL	SPEC. NO.
日テ W-KL620YN	TG-3600M-1

Control No. TG-3600M-1/MB-10

# TG-3600M

## CRANE SPECIFICATIONS

### CRANE CAPACITY

<b>Boom</b>			
14.2m	Boom	360,000kg	at 3.0m (17 part-line×2)
23.4m	Boom	180,000kg	at 4.5m (17 part-line)
32.6m	Boom	130,000kg	at 5.0m (12 part-line)
41.8m	Boom	100,000kg	at 6.0m (9 part-line)
51.0m	Boom	68,000kg	at 7.0m (6 part-line)
Single top		12,500kg	(1 part-line)
[Reference]			
<b>Fully automatic luffing jib</b>			
11.1m	Jib	54,000kg	at 7.0m (5 part-line)
19.1m	Jib	29,000kg	at 8.0m (3 part-line)
27.1m	Jib	10,000kg	at 22.0m (1 part-line)
35.1m	Jib	9,500kg	at 16.0m (1 part-line)
<b>Luffing jib</b>			
17m	Jib	100,000kg	at 10.0m (9 part-line)
23m	Jib	80,000kg	at 12.0m (8 part-line)
35m	Jib	51,600kg	at 16.0m (6 part-line)
47m	Jib	31,000kg	at 18.0m (4 part-line)
65m	Jib	7,000kg	at 30.0m (1 part-line)
70m	Jib	5,000kg	at 35.0m (1 part-line)

### MAX. LIFTING HEIGHT

Boom	51.0m
[Reference] Fully automatic luffing jib	88.0m
[Reference] Luffing jib	98.0m
	119.0m (luffing jib + extension jib)

### MAX. WORKING RADIUS

Boom	46.0m
[Reference] Fully automatic luffing jib	64.0m
[Reference] Luffing jib	65.0m
	90.0m (luffing jib + extension jib)

### BOOM LENGTH

14.2m - 51.0m

### MAIN WINCH SINGLE LINE SPEED

145m/min (5th layer)

### AUXILIARY WINCH SINGLE LINE SPEED

145m/min (5th layer)

### BOOM ELEVATION ANGLE

-1° - 83°

### BOOM ELEVATION SPEED

-1° - 83° / 140s

### SWING ANGLE

360° continue

### SWING SPEED

1.1 rpm

### WIRE ROPE

<b>Main Winch</b>	
25mm × 450m (Diameter×Length)	
Spin-resistant wire rope	
<b>Auxiliary Winch</b>	
25mm × 450m (Diameter×Length)	
Spin-resistant wire rope	

### HOOK

180t	hook (17 part-line)
80t	hook (6 part-line)
25t	hook (2 part-line)---option
12.5t	hook (1 part-line)

### BOOM

5-section hydraulically sequentially telescoping boom of box construction  
Every step lock or no lock  
(spring type and air cylinder type)

### BOOM EXTENSION

4 double-acting hydraulic cylinders

### SINGLE TOP

Single sheave. Mounted to main boom head by pin.

### HOIST

Driven by hydraulic variable motor and via planetary gear reducer  
Automatic brake  
High/low speed changeover and creep operation device provided.  
2 single winches

### BOOM ELEVATION

2 double-acting hydraulic cylinders

### SWING

Hydraulic motor driven planetary gear reducer  
Roller type swing bearing  
Disk type negative brake  
High/low speed changeover and creep operation device provided.  
Swing free/lock changeover type  
Pneumatically operated swing lock

### OUTRIGGERS

Fully hydraulic H-type 3 steps  
Slides and jacks each provided with independent operation device.  
Full extended width 8.5m  
Middle extended width 7.0m, 5.9m  
Extended width detector provided.

### FRONT JACK

1 hydraulic type (with grounding detector)

### REAR JACK

2 hydraulic types (with grounding detector)

### ENGINE FOR CRANE

Model	NISSAN DIESEL RF804
Type	4-cycle V8-cylinder, direct-injection, water-cooled diesel engine
Piston Displacement	16,991cc
Max. Output	270PS at 1,700rpm
Max. Torque	107kg·m at 1,400rpm

### HYDRAULIC PUMPS

2 variable piston pumps and 2 variable gear pumps

### HYDRAULIC OIL TANK CAPACITY

Upper	2,630 liters
Lower	200 liters

### SAFETY DEVICES

Automatic moment limiter (AML)  
With working range function  
Outrigger extension automatic detector  
Front jack grounding automatic detector  
Rear jack grounding automatic detector  
Weight combination automatic detector  
Over-winding cutout  
Dead winding holding device  
Cable follower  
Hook safety latch  
Winch drum lock  
Winch drum rotation indicator  
Hydraulic safety valve  
Hydraulic lock (elevation, expansion and contraction, hoist, jack, jib tilt, dismount)  
Swing lock  
Boom angle indicator  
Level gauge  
Front jack overload alarm

### EQUIPMENTS

Air conditioner (crane cab)  
Radio  
Fan  
Oil cooler  
Boom dismount device  
Swing frame dismount device  
Counterweight dismount device  
Iron plate  
Automatic engine air removing device

## CARRIER SPECIFICATIONS

### MANUFACTURER

NISSAN DIESEL MOTOR CO.,LTD

### CARRIER MODEL

W-KL620YN

### ENGINE

Model RF10

Type 4-cycle V10-cylinder, direct-injection, water-cooled diesel engine

Piston displacement 21,239cc

Max. output 420PS at 2,200rpm

Max. torque 142kg·m at 1,400rpm

### CLUTCH

Dry multi-plate coil spring type

### TRANSMISSION

5-forward and 1-reverse speeds (with 2-step sub reducer)

Constant-mesh gear

### REDUCER

Spiral bevel gear type (2nd axle) and hypoid gear type (4th and 5th axles)

Planetary gear type hub reduction

### FRONT AXLE

1st axle: Reverse-elliot type

2nd axle: Full-floating type, reverse-elliot type

### REAR AXLE

3rd, 6th axles: Reverse-elliot type

4th, 5th axles: Full-floating type

### SUSPENSION

1st, 2nd axles: Semi-elliptic leaf spring type, vehicle shaft type

3rd, 6th axles: Hydraulic type

4th, 5th axles: Equalizer beam type

### STEERING

Recirculating ball screw type

With linkage power assistance

1st, 2nd, 3rd, 6th axle steering

### BRAKE SYSTEM

Service Brake

Foot operated full air brake on 10 wheels, dual air line system, internal expanding leading and trailing shoe type.

Parking Brake

Foot operated full air brake type spring brake, acting on wheels

Auxiliary Brake

Electro-pneumatic operated exhaust brake.

Emergency

Works by applying the parking brake

### ELECTRIC SYSTEM

24 V DC 2 batteries of 115F51 (96Ah)

### FUEL TANK CAPACITY

300 liters

### CAB

Two-man type

### TIRES

Front 14.00-24-24PR

Rear 14.00-24-24PR

### STANDARD EQUIPMENTS

Car heater

Car radio

Car cooler

## GENERAL DATA

### DIMENSIONS (CARRIER ONLY)

Overall length 13,510mm

Overall width 3,400mm

Overall height 2,790mm

Wheel base 1,500mm + 2,800mm + 1,950mm

+ 1,500mm + 1,500mm = 9,250mm

Tread 2,830mm (1st, 2nd, 3rd, 6th axles)

2,540mm (4th, 5th axles)

### WEIGHTS (CARRIER ONLY)

Gross vehicle weight

Total 44,950kg

### PERFORMANCE (CARRIER ONLY)

Max. traveling speed 60km/h

Gradeability (tan  $\theta$ ) 0.31

Min. turning radius 11.8m

**TOTAL RATED LOADS**

**NOTES:**

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability.
2. The weights of the slings and hooks are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom and jib.
4. The chart below shows the standard number of part lines for each boom length.

<b>A</b>	<b>14.2</b>		<b>23.4</b>		<b>32.6</b>	<b>41.8</b>	<b>51.0</b>
<b>H</b>	<b>360</b>	<b>180</b>	<b>180</b>	<b>170</b>	<b>130</b>	<b>100</b>	<b>68</b>
<b>J</b>	<b>17×2</b>	<b>17</b>	<b>17</b>	<b>16</b>	<b>120</b>	<b>9</b>	<b>6</b>
<b>K</b>	<b>180×2</b>	<b>180</b>	<b>180</b>	<b>180</b>	<b>180</b>	<b>180</b>	<b>80</b>
<b>L</b>	<b>8×2</b>	<b>8</b>	<b>8</b>	<b>8</b>	<b>8</b>	<b>8</b>	<b>3</b>
<b>M</b>	<b>2,400×2</b>	<b>2,400</b>	<b>2,400</b>	<b>2,400</b>	<b>2,400</b>	<b>2,400</b>	<b>1,360</b>
<b>Remarks</b>	360t sling support, hook support for the top boom (4,150kg)	Attachment sheave for the top boom	Attachment sheave for the top boom				






- A = Boom length (m)
- H = Total rated loads (t)
- J = No. of part-lines
- K = Hook lifting capacity (t)
- L = No. of sheaves
- M = Hook weight (kg)

5. Boom length and boom fixing pin  
The boom expansion and contraction order, stroke of each boom, boom length, boom fixing pin condition when the boom and jib are used are as follows.

- 1) Boom expansion and contraction order and stroke of each boom
  - Expand the boom from the base boom side, and then expand the next boom when the boom is expanded by the strokes shown in the following table.
  - Contract the boom from the top boom side, and then contract the next boom when the boom is contracted by the strokes shown in the following table.

Crane service condition	Boom stroke
Boom	9.2m
Fully automatic luffing jib	
Luffing jib	8.4m

2) Boom length and boom fixing pin status

Boom length		Pin condition when the boom fixing pin is used
· Boom · Fully automatic luffing jib	· Luffing jib	
14.2m	14.2m	 <ul style="list-style-type: none"> <li>● Pin inserted</li> <li>○ Pin removed</li> <li>◐ Both pin insertion and removal are available.</li> </ul>
23.4m	22.6m	
32.6m	31.0m	
41.8m	39.4m	
51.0m	47.8m	

- If there is at least one ○ in the "pin condition when the boom fixing pin is used" column in the above chart, the performance when the boom fixing pin is not used is applied.
- When operating the jib (fully automatic luffing jib, luffing jig), the boom length and the boom fixing pin condition must be in accordance with the above chart.

6. As shown in the following table, the performance depends on the outrigger installation condition, counterweight combination, and whether or not the boom fixing pin is used.


1) Performance classification

Counterweight Outrigger extension width	85t	65t	45t	20t	0t	65t on the carrier
8.5m	A	B (D)	C (D)	D (E)	E (F)	D (E)
7.0m	※	C (D)	D (D)	E (E)	F (F)	E (E)
5.9m	※	※	D (D)	E (E)	F (F)	E (E)

- The performance in the parentheses is applied if even either one of the front jack or rear jack is not used. However, when attaching a 85t counterweight, always use the front jack and rear jack.
- Performance F is for the work preparation. The boom length is 14.2m to 23.4m.
- ※ shows the prohibition in order to prevent the crane from falling down on its rear side.

2) Working area

In the following cases, the total rated load varies according to the swing position. Be careful about the AML moment indication (%) because an overload may be applied in some swing directions.

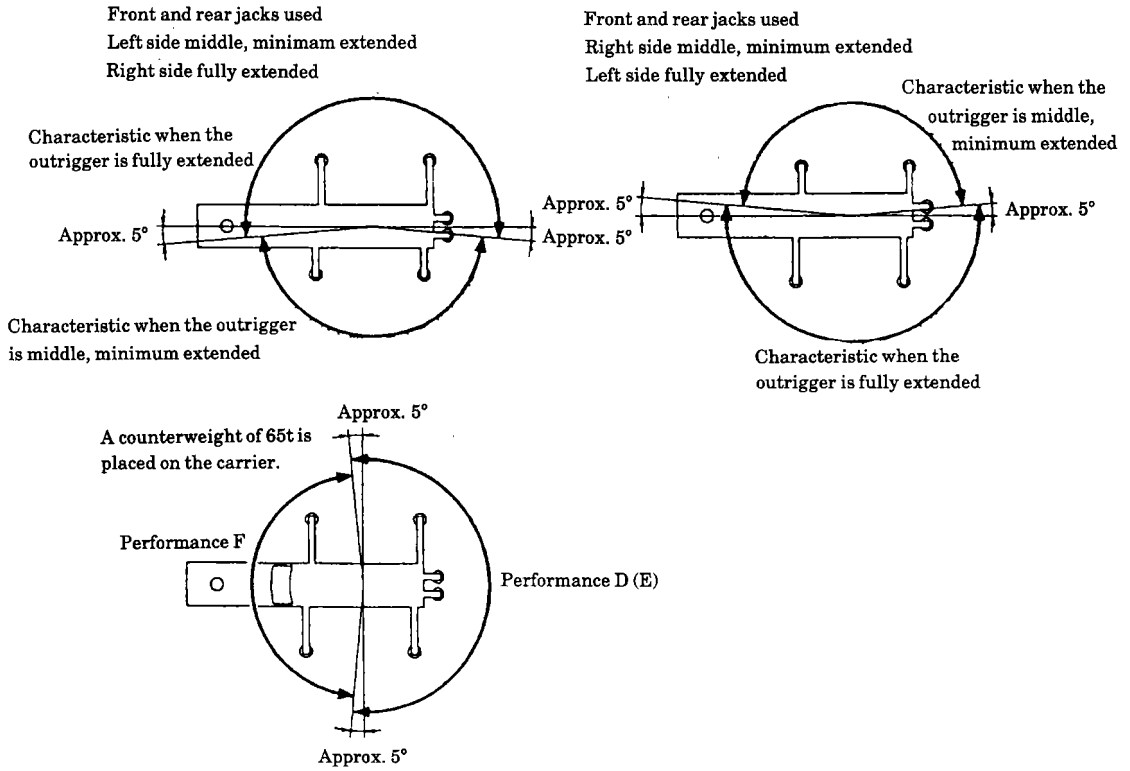

3) When the boom length and the boom fixing pin condition are other than those stated in the chart "Boom length and the boom fixing pin condition" in item 5. 2), the maximum total rated load for each boom length is limited as shown in the following table. The rated total loads below the limit value remain as they are and are the same when the boom fixing pin is used. However, when removing the boom fixing pin, the total rated loads for every boom length should be 25 tons or less.

Boom length	23.4m	32.6m	41.8m	51.0m
Max. total rated load (t)	52.0	50.0	30.0	30.0

7. The total rated load for the single top is the same as that of the main boom and must not exceed 12.5 tons. However, when hooks, slings, etc. are mounted on the main boom, one should work at the rated load obtained by subtracting the weights of the hooks, slings, etc. mounted on the main boom from the total rated load of the main boom.
8. Do not swing the upper swing frame on tires.  
(Keep the swing frame locked until the outrigger is installed.)

**TOTAL RATED LOADS**

[BOOM]

Performance A

Unit:ton

B (m)	A				
	14.2m	23.4m	32.6m	41.8m	51.0m
3.0	360.0	180.0			
3.5	300.0	180.0			
4.0	260.0	180.0			
4.5	240.0	180.0			
5.0	225.0	175.0	130.0		
6.0	190.0	162.0	120.0	100.0	
7.0	163.0	150.0	112.0	95.0	68.0
8.0	143.0	135.0	106.0	86.0	65.0
9.0	125.0	120.0	105.0	79.0	62.0
10.0	110.0	110.0	95.0	72.0	55.0
11.0		100.0	87.0	67.0	50.0
12.0		90.0	80.0	61.2	47.0
14.0		75.0	68.0	53.0	41.0
16.0		63.0	59.0	46.0	36.2
18.0		53.0	52.0	42.0	32.7
20.0		44.0	46.0	38.0	29.7
22.0			40.0	34.0	26.5
24.0			35.5	31.0	24.0
26.0			30.5	28.0	22.0
28.0			26.5	25.0	20.5
30.0				22.5	19.0
32.0				20.0	17.5
34.0				18.0	16.0
36.0				17.0	14.5
38.0				15.0	13.5
40.0					12.0
42.0					11.3
44.0					10.6
46.0					9.5

A = Boom length

B = Working radius

## Performance B

Unit:ton

B (m)	A				
	14.2m	23.4m	32.6m	41.8m	51.0m
3.0	360.0	180.0			
3.5	300.0	180.0			
4.0	260.0	180.0			
4.5	240.0	180.0			
5.0	225.0	175.0	130.0		
6.0	190.0	162.0	120.0	100.0	
7.0	159.0	150.0	112.0	95.0	68.0
8.0	136.0	133.0	106.0	86.0	65.0
9.0	118.0	115.0	97.0	79.0	62.0
10.0	104.0	103.0	88.0	72.0	55.0
11.0		91.0	82.0	67.0	50.0
12.0		81.0	75.0	61.2	47.0
14.0		66.0	65.0	53.0	41.0
16.0		53.0	56.0	46.0	36.2
18.0		42.0	46.0	42.0	32.7
20.0		34.0	38.0	37.0	29.7
22.0			32.0	32.0	26.5
24.0			27.0	29.0	24.0
26.0			22.5	25.0	22.0
28.0			17.0	21.5	20.5
30.0				18.5	19.0
32.0				15.8	17.5
34.0				13.0	15.5
36.0				11.0	13.5
38.0				9.5	12.0
40.0					10.5
42.0					9.0
44.0					7.8
46.0					6.6

A = Boom length

B = Working radius



## Performance C

Unit:ton

B (m)	A				
	14.2m	23.4m	32.6m	41.8m	51.0m
3.0	320.0	180.0			
3.5	265.0	180.0			
4.0	235.0	180.0			
4.5	215.0	170.0			
5.0	200.0	165.0	130.0		
6.0	170.0	150.0	120.0	100.0	
7.0	143.0	137.0	112.0	95.0	68.0
8.0	122.0	120.0	106.0	86.0	65.0
9.0	106.0	104.0	97.0	79.0	62.0
10.0	94.0	91.0	88.0	72.0	55.0
11.0		80.0	80.0	67.0	50.0
12.0		72.0	72.0	61.2	47.0
14.0		56.0	57.0	53.0	41.0
16.0		43.0	44.0	46.0	36.2
18.0		34.0	35.0	37.8	32.7
20.0		27.5	28.0	30.8	29.7
22.0			23.0	25.5	26.5
24.0			19.0	21.2	24.0
26.0			15.0	17.7	20.4
28.0			12.0	14.5	17.5
30.0				11.8	15.0
32.0				9.5	12.6
34.0				7.5	10.5
36.0				5.8	8.5
38.0				4.3	7.0
40.0					5.7
42.0					4.5
44.0					3.4
46.0					2.4

A = Boom length

B = Working radius

## Performance D

Unit:ton

B (m)	A				
	14.2m	23.4m	32.6m	41.8m	51.0m
3.0	250.0	180.0			
3.5	215.0	170.0			
4.0	190.0	165.0			
4.5	165.0	150.0			
5.0	148.0	135.0	120.0		
6.0	120.0	115.0	105.0	100.0	
7.0	100.0	96.0	95.0	90.0	
8.0	85.0	81.0	82.0	80.0	
9.0	72.0	69.0	70.0	70.0	
10.0	62.0	60.0	60.0	60.0	50.0
11.0		51.0	51.0	56.0	47.0
12.0		45.0	44.0	49.0	44.0
14.0		33.0	35.0	39.0	38.0
16.0		24.0	27.0	30.0	31.5
18.0		18.0	21.0	23.0	26.0
20.0		13.0	15.5	18.0	21.0
22.0			11.2	14.0	17.0
24.0			7.7	10.5	13.5
26.0			4.9	7.6	11.0
28.0			2.6	5.2	8.5
30.0				3.2	6.4
32.0					4.6
34.0					3.0

A = Boom length

B = Working radius

Performance E

Unit:ton

B (m)	A				
	1 4. 2 m	2 3. 4 m	3 2. 6 m	4 1. 8 m	5 1. 0 m
3. 0	2 0 0. 0	1 7 0. 0			
3. 5	1 8 0. 0	1 6 5. 0			
4. 0	1 6 5. 0	1 5 0. 0			
4. 5	1 5 0. 0	1 3 5. 0			
5. 0	1 4 0. 0	1 2 0. 0	1 0 0. 0		
6. 0	1 2 0. 0	1 0 0. 0	8 0. 0	9 0. 0	
7. 0	8 0. 0	8 0. 0	6 7. 0	8 0. 0	
8. 0	6 2. 0	5 8. 0	5 9. 0	6 3. 0	
9. 0	4 8. 0	4 4. 0	4 6. 0	4 9. 0	
1 0. 0	4 0. 0	3 5. 0	3 7. 0	4 0. 0	4 4. 0
1 1. 0		2 9. 0	3 1. 0	3 3. 0	3 7. 0
1 2. 0		2 4. 0	2 5. 0	2 8. 0	3 1. 0
1 4. 0		1 6. 0	1 7. 5	2 0. 0	2 3. 0
1 6. 0		1 0. 0	1 1. 5	1 4. 0	1 7. 0
1 8. 0		6. 0	7. 0	1 0. 0	1 3. 0
2 0. 0		3. 0	3. 0	6. 5	1 0. 0
2 2. 0				4. 0	7. 0
2 4. 0					4. 0

Performance F


Unit:ton

B (m)	A	
	1 4. 2 m	2 3. 4 m
3. 0	1 6 0. 0	1 4 5. 0
3. 5	1 4 5. 0	1 4 5. 0
4. 0	1 3 0. 0	1 3 0. 0
4. 5	1 1 5. 0	1 1 5. 0
5. 0	1 0 4. 0	1 0 0. 0
6. 0	6 4. 0	8 0. 0
7. 0	4 4. 0	5 1. 0
8. 0	3 1. 0	3 2. 0
9. 0	2 4. 0	2 1. 0
1 0. 0	1 8. 0	1 4. 0
1 1. 0		9. 0

A = Boom length

B = Working radius

## WORKING RADIUS - LIFTING HEIGHT [BOOM]



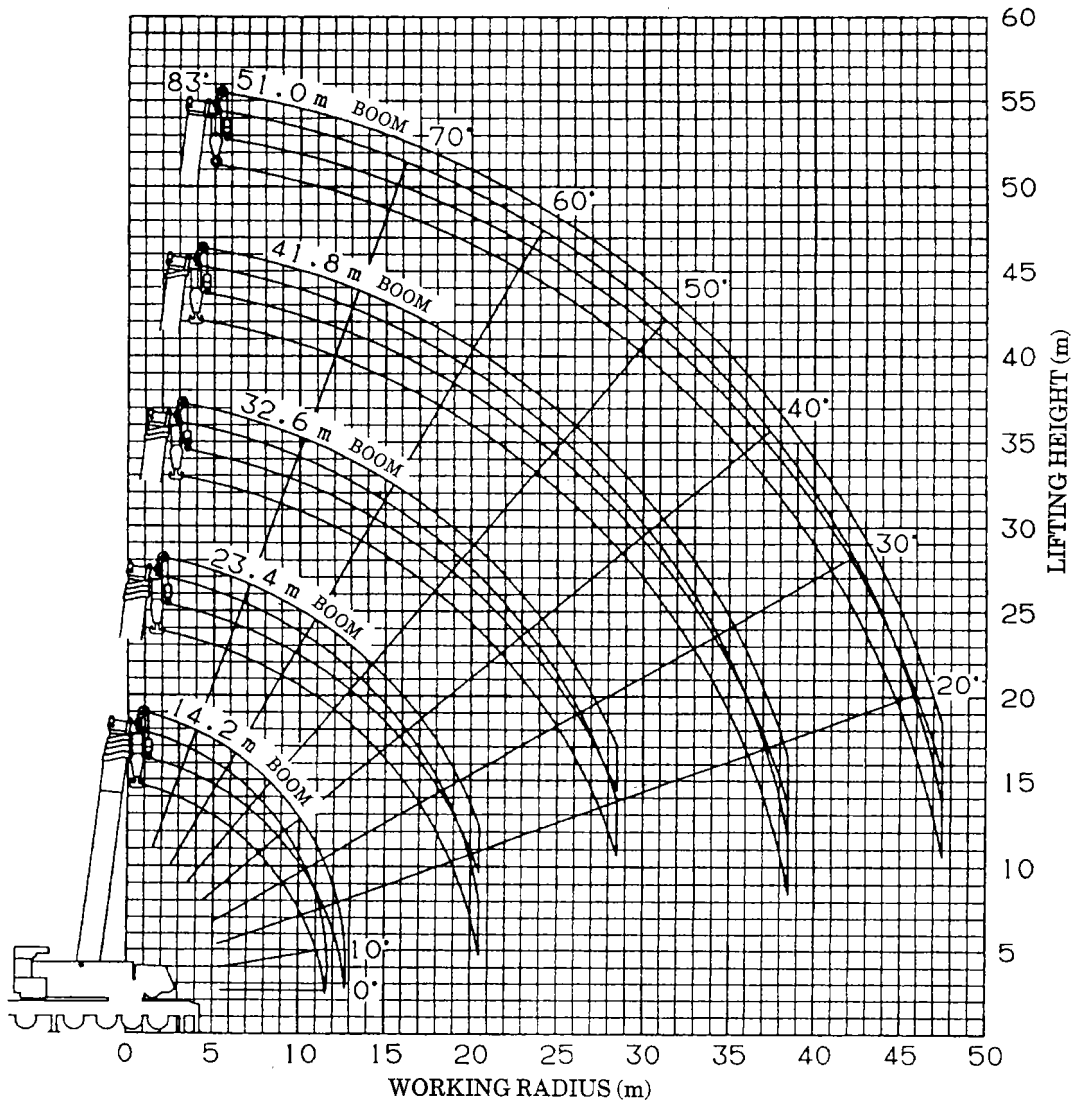


**NOTES:**

1. The deflection of the boom is not included in the figure above.
2. The above chart is for Performance A.

**DIMENSIONS**

[On-site traveling condition]

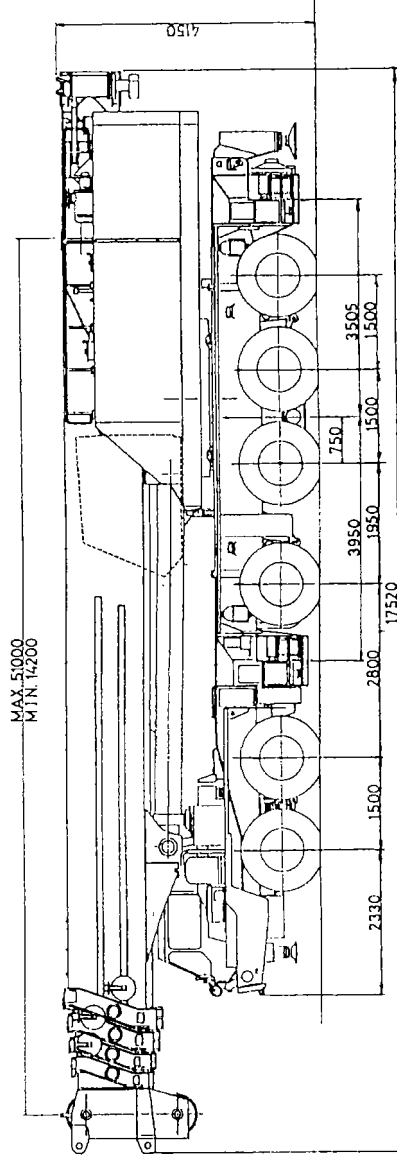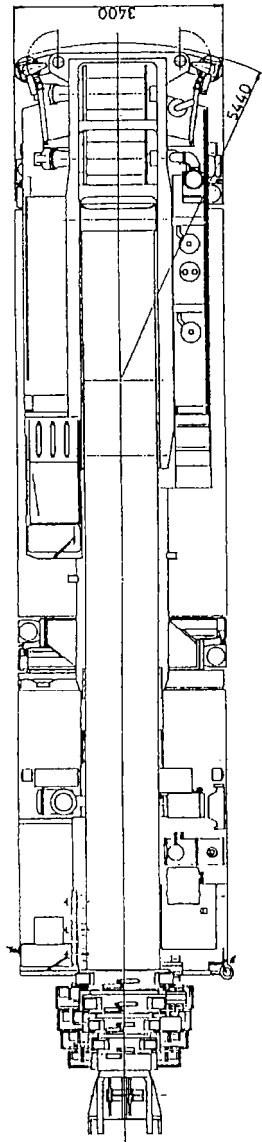

◆ MEMO ◆

A series of horizontal dashed lines for writing.