

TRUCK CRANE

TL-300M

JAPANESE SPECIFICATIONS

TL

CARRIER MODEL	OUTLINE	SPEC. NO.
NISSAN DIESEL P-KG45S	4-section Boom, 2-stage Jib	TL-300M-2-10101
mitsubishi P-K303		TL-300M-2-20101

Control No. JA-02

TL-300M

CRANE SPECIFICATIONS

CRANE CAPACITY

10.6m Boom	30,000kg	at 3.5m	(10 part-line)
14.5m Boom	23,500kg	at 4.3m	(8 part-line)
18.4m Boom	18,500kg	at 5.3m	(8 part-line)
22.3m Boom	15,000kg	at 6.2m	(5 part-line)
26.2m Boom	13,000kg	at 6.5m	(5 part-line)
30.1m Boom	10,000kg	at 8.0m	(4 part-line)
34.0m Boom	8,000kg	at 9.2m	(4 part-line)
8.5m Jib	3,400kg	at 76°	(1 part-line)
14.5m Jib	2,300kg	at 76.6°	(1 part-line)
Single top	3,400kg		(1 part-line)

MAX. LIFTING HEIGHT

Boom	33.9m
Jib	48.0m

MAX. WORKING RADIUS

Boom	30.0m
Jib	37.7m

BOOM LENGTH

10.6m – 34.0m

BOOM EXTENSION

23.4m

BOOM EXTENSION SPEED

23.4m / 128s

JIB LENGTH

8.5m, 14.5m

MAIN WINCH SINGLE LINE SPEED

High range:	122m/min	(4th layer)
Low range:	61m/min	(4th layer)

MAIN WINCH HOOK SPEED

High range:	12.2m/min	(10 part-line)
Low range:	6.1m/min	(10 part-line)

AUXILIARY WINCH SINGLE LINE SPEED

High range:	104m/min	(2nd layer)
Low range:	52m/min	(2nd layer)

AUXILIARY WINCH HOOK SPEED

High range:	104m/min	(1 part-line)
Low range:	52m/min	(1 part-line)

BOOM ELEVATION ANGLE

-3° – 80°

BOOM ELEVATION SPEED

-3° – 80° / 70s

SWING ANGLE

360° continue

SWING SPEED

2.5rpm

WIRE ROPE

Main Winch

16mm × 185m (Diameter×Length)
 7×7+6×Fi(29) Class B ordinary · Z twist
 Spin-resistant wire rope
 Breaking strength 17.6t

Auxiliary Winch

16mm × 105m (Diameter×Length)
 7×7+6×Fi(29) Class B ordinary · Z twist
 Spin-resistant wire rope
 Breaking strength 17.6t

BOOM

4-section hydraulically telescoping boom of box construction.

(stage 2: sequential; stages 3,4: synchronized)

BOOM EXTENSION

2 double-acting hydraulic cylinder
 1 wire rope type telescoping device

JIB

2-staged swingaround boom extension which stores alongside boom base section.
 Triple offset (5°, 25°, 45°) type

SINGLE TOP

Single sheave. Mounted to main boom head for single line work.

HOIST

Hydraulic motor driven planetary gear reducer
 With free-fall device.
 Automatic brake (with foot brake for free-fall device)
 2 single winches

BOOM ELEVATION

1 double-acting hydraulic cylinders

SWING

Hydraulic motor driven planetary gear reducer
 Swing bearing
 Swing free/lock changeover type
 Hand brake

OUTRIGGERS

Fully hydraulic H-type (floats mounted integrally)
 Slides and jacks each provided with independent operation device.

Full extended width	6.1m
Middle extended width	4.0m

FRONT JACK

Hydraulic operated type

MAX. OUTRIGGER LOAD

32.0t

HYDRAULIC PUMPS

3 gear pumps

HYDRAULIC OIL TANK CAPACITY

432 liters

SAFETY DEVICES

Automatic moment limiter (AML)
 Working area control device
 Over-winding cutout
 Level gauge
 Hook safety latch
 Winch drum lock
 Hydraulic safety valve
 Telescopic counterbalance valve
 Elevation counterbalance valve
 Jack pilot check valve
 Front jack over load alarm

EQUIPMENTS

Boom angle indicator
 Oil cooler
 Crane cab heater
 Radio
 Fan
 Block

CARRIER SPECIFICATIONS

MANUFACTURER

NISSAN DIESEL MOTOR CO., LTD

CARRIER MODEL

P-KG45S

ENGINE

Model PE6 (with turbo)

Type 4-cycle, in-line 6-cylinder, direct-injection water-cooled diesel engine

Piston displacement 11,670cc

Max. output 280PS at 2,200rpm

Max. torque 110kg-m at 1,200rpm

CLUTCH

Dry single-plate coil spring type

TRANSMISSION

6-forward and 1-reverse speeds

Constant-mesh gear (1st speed, reverse)

Synchronized-mesh gear (2nd - 6th speeds)

REDUCER

Hypoid gear type

FRONT AXLE

Reverse Elliot-type steel pipe cross section

REAR AXLE

Full floating, cast torque rods

SUSPENSION

Front Laminated leaf spring type

Rear Equalizer and torque rods

STEERING

Recirculating ball screw type with linkage power assistance

BRAKE SYSTEM

Service Brake

2-circuit hydro-pneumatic type, 8-wheels internal expanding brake

Parking Brake

Mechanically operated, duo-servo shoe type acting on drum at transmission case rear.

Auxiliary Brake

Electro-pneumatic operated exhaust brake

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12V (120Ah)

FUEL TANK CAPACITY

200 liters

CAB

Two-man type

TIRES

Front 11.00-20-14PR

Rear 10.00-20-14PR

STANDARD EQUIPMENTS

Car heater

Car radio

GENERAL DATA

DIMENSIONS

Overall length 12,660mm

Overall width 2,490mm

Overall height 3,400mm

Wheel base 1,520mm + 3,530mm + 1,300mm = 6,350mm

Tread Front 2,020mm

Rear 1,860mm

WEIGHTS

Gross vehicle weight

Total 31,680kg

Front 12,300kg

Rear 19,380kg

PERFORMANCE

Max. traveling speed 60km/h

Gradeability (tan θ) 0.36

Min. turning radius 10.5m

CARRIER SPECIFICATIONS

MANUFACTURER

MITSUBISHI MOTOR CORPORATION

CARRIER MODEL

P-K303

ENGINE

Model 8DC8

Type 4-cycle V8-cylinder, direct-injection, water-cooled diesel engine

Piston displacement 14,886cc

Max. output 290PS at 2,200rpm

Max. torque 100kg·m at 1,400rpm

CLUTCH

Dry single-plate type, hydraulic control with clutch booster

TRANSMISSION

5-forward and 1-reverse speeds

Constant-mesh gear (1st speed, reverse)

Synchronized-mesh gear (2nd - 5th speeds)

REDUCER

1-stage speed reduction type

Hypoid gear type

FRONT AXLE

Reverse-elliot type steering knuckles

REAR AXLE

Full-floating type, cast-steel housing

SUSPENSION

Front Laminated semi-elliptical leaf spring type

Rear Equalizer beam and torque rod type

STEERING

Recirculating ball screw type

Integral power steering

BRAKE SYSTEM

Service Brake

Foot operated full air brake on all wheels, air over hydraulic type, internal expanding leading and trailing shoe type.

Parking Brake

Mechanically operated, internal expanding duo-servo shoe type acting on drum at transmission case rear.

Auxiliary Brake

Exhaust brake

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12V (140Ah)

FUEL TANK CAPACITY

200 liters

CAB

Two-man type

TIRES

Front 11.00-20-14PR

Rear 10.00-20-14PR

STANDARD EQUIPMENTS

Car heater

Car radio

GENERAL DATA

DIMENSIONS

Overall length 12,660mm

Overall width 2,490mm

Overall height 3,390mm

Wheel base 1,450mm + 3,600mm + 1,350mm = 6,400mm

Tread Front 2,040mm

Rear 1,845mm

WEIGHTS

Gross vehicle weight

Total 31,500kg

Front 11,950kg

Rear 19,550kg

PERFORMANCE

Max. traveling speed 65km/h

Gradeability (tan θ) 0.29

Min. turning radius 11.0m

TOTAL RATED LOADS


(1)

Unit : ton

· Outriggers fully extended + Front jack (360°) · Outriggers fully extended (Over rear · Over sides)							
A B (m)	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m
3.0	30.00	23.50	18.50				
3.5	30.00	23.50	18.50	15.00			
4.0	26.60	23.50	18.50	15.00	13.00		
4.3	24.80	23.50	18.50	15.00	13.00		
5.0	21.40	20.80	18.50	15.00	13.00	10.00	
5.3	20.20	19.70	18.50	15.00	13.00	10.00	
5.5	19.50	19.00	17.90	15.00	13.00	10.00	8.00
6.0	17.70	17.50	16.70	15.00	13.00	10.00	8.00
6.2	17.00	16.90	16.30	15.00	13.00	10.00	8.00
6.5	16.20	16.00	15.60	14.45	13.00	10.00	8.00
7.0	14.80	14.60	14.60	13.55	12.25	10.00	8.00
8.0	12.40	12.35	12.50	11.95	10.95	10.00	8.00
9.0	10.40	10.05	10.05	10.40	9.75	8.90	8.00
9.2		9.70	9.70	10.10	9.50	8.70	8.00
10.0		8.50	8.35	8.90	8.75	8.10	7.40
12.0		6.00	5.90	6.35	6.65	6.80	6.20
12.5		5.50	5.40	5.85	6.15	6.30	5.90
14.0			4.25	4.70	4.95	5.20	5.30
16.0			3.10	3.55	3.80	4.00	4.10
16.5			2.80	3.25	3.50	3.75	3.90
18.0				2.65	2.95	3.15	3.25
20.0				1.95	2.25	2.45	2.60
20.5				1.75	2.10	2.30	2.50
22.0					1.70	1.95	2.05
24.0					1.20	1.50	1.60
24.5					1.10	1.40	1.50
26.0						1.05	1.25
28.0						0.70	0.95
28.5						0.60	0.85
30.0							0.65

A = Boom length B = Working radius

Unit : ton

· Outriggers fully extended + Front jack (360°) · Outriggers fully extended (Over rear · Over sides)						
 C D E (°)	8.5 m			14.5 m		
	5°	25°	45°	5°	25°	45°
80	3.40	2.00	1.40	2.30	1.10	0.75
76.6	3.40	2.00	1.40	2.30	1.10	0.75
76	3.40	2.00	1.40	2.24	1.08	0.72
75	3.28	1.98	1.39	2.16	1.06	0.69
70	2.86	1.90	1.35	1.70	0.95	0.64
65	2.45	1.77	1.29	1.43	0.87	0.59
60	2.03	1.66	1.23	1.20	0.80	0.55
55	1.33	1.20	1.15	1.06	0.76	0.52
50	0.83	0.75	0.74	0.65	0.59	0.50
45	0.46	0.41	0.41	0.34	0.31	0.30
44	0.39	0.35	0.35			

C = Jib length D = Jib offset E = Boom angle

NOTES:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values are based on the crane strength.
2. The weights of the slings and hooks (main winch hook: 350kg, auxiliary winch hook: 60kg) are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 3.0t for the main winch and 3.4t for the auxiliary winch.

A	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m	J
H	10	8	8	5	5	4	4	1

A = Boom length H = No. of part-line J = Jib / Single top

5. As a rule, free-fall operations should be performed only when lowering the hook alone. If a hoisted load must be lowered by free-fall operation, the load must be kept below 1/5th of the total rated load (the load per line must be 0.6t or less for the main winch and 0.7t for the auxiliary winch) and sudden braking operations must be avoided.
6. The total rated loads for the single top are obtained by subtracting the corresponding values below from the total rated load of the boom and must not exceed 3.4t.

A	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m
Q	0kg	150kg	150kg	250kg	250kg	300kg	300kg

A = Boom length Q = Subtracted load

(2)

Unit : ton

· Outriggers middle extended (360°) · Outriggers fully extended (Over front)							
A \ B (m)	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m
3.0	30.00	23.50	18.50				
3.5	25.70	23.50	18.50	15.00			
4.0	22.50	22.30	18.50	15.00	13.00		
4.5	19.80	19.70	18.50	15.00	13.00		
5.0	17.00	16.20	16.00	15.00	13.00	10.00	
5.5	14.00	13.60	13.40	14.00	13.00	10.00	8.00
6.0	11.90	11.70	11.50	12.00	12.30	10.00	8.00
6.8	9.45	9.25	9.05	9.55	9.85	10.00	8.00
7.0	9.00	8.80	8.65	9.15	9.40	9.65	8.00
7.8	7.30	7.15	7.00	7.50	7.75	8.00	8.00
8.0	7.00	6.85	6.70	7.20	7.45	7.70	7.85
9.0	5.50	5.45	5.35	5.85	6.10	6.35	6.50
10.0		4.40	4.25	4.75	5.00	5.25	5.40
12.0		2.90	2.75	3.20	3.50	3.70	3.85
12.5		2.55	2.45	2.95	3.20	3.40	3.55
14.0			1.65	2.20	2.45	2.65	2.80
16.0			0.75	1.35	1.70	1.90	2.05
16.5			0.55	1.15	1.55	1.75	1.85
18.0				0.65	1.05	1.30	1.50
20.0					0.50	0.80	1.00

Unit : ton

· Outriggers middle extended (360°) · Outriggers fully extended (Over front)						
C \ D \ E (°)	8.5 m			14.5 m		
	5°	25°	45°	5°	25°	45°
80	3.40	2.00	1.40	2.30	1.10	0.75
76.6	3.40	2.00	1.40	2.30	1.10	0.75
76	3.40	2.00	1.40	2.24	1.08	0.72
75	3.28	1.98	1.39	2.16	1.06	0.69
70	2.20	1.84	1.35	1.70	0.95	0.64
65	1.18	0.98	0.92	0.94	0.75	0.59

A = Boom length B = Working radius C = Jib length D = Jib offset E = Boom angle

NOTES:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values are based on the crane strength.
2. The weights of the slings and hooks (main winch hook: 350kg, auxiliary winch hook: 60kg) are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 3.0t for the main winch and 3.4t for the auxiliary winch.

A	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m	J
H	10	8	8	5	5	4	4	1


A = Boom length H = No. of part-line J = Jib / Single top

5. As a rule, free-fall operations should be performed only when lowering the hook alone. If a hoisted load must be lowered by free-fall operation, the load must be kept below 1/5th of the total rated load (the load per line must be 0.6t or less for the main winch and 0.7t for the auxiliary winch) and sudden braking operations must be avoided.
6. The total rated loads for the single top are obtained by subtracting the corresponding values below from the total rated load of the boom and must not exceed 3.4t.

A	10.6m	14.5m	18.4m	22.3m	26.2m	30.1m	34.0m
Q	0kg	150kg	150kg	250kg	250kg	300kg	300kg

A = Boom length Q = Subtracted load


WORKING RADIUS - LIFTING HEIGHT

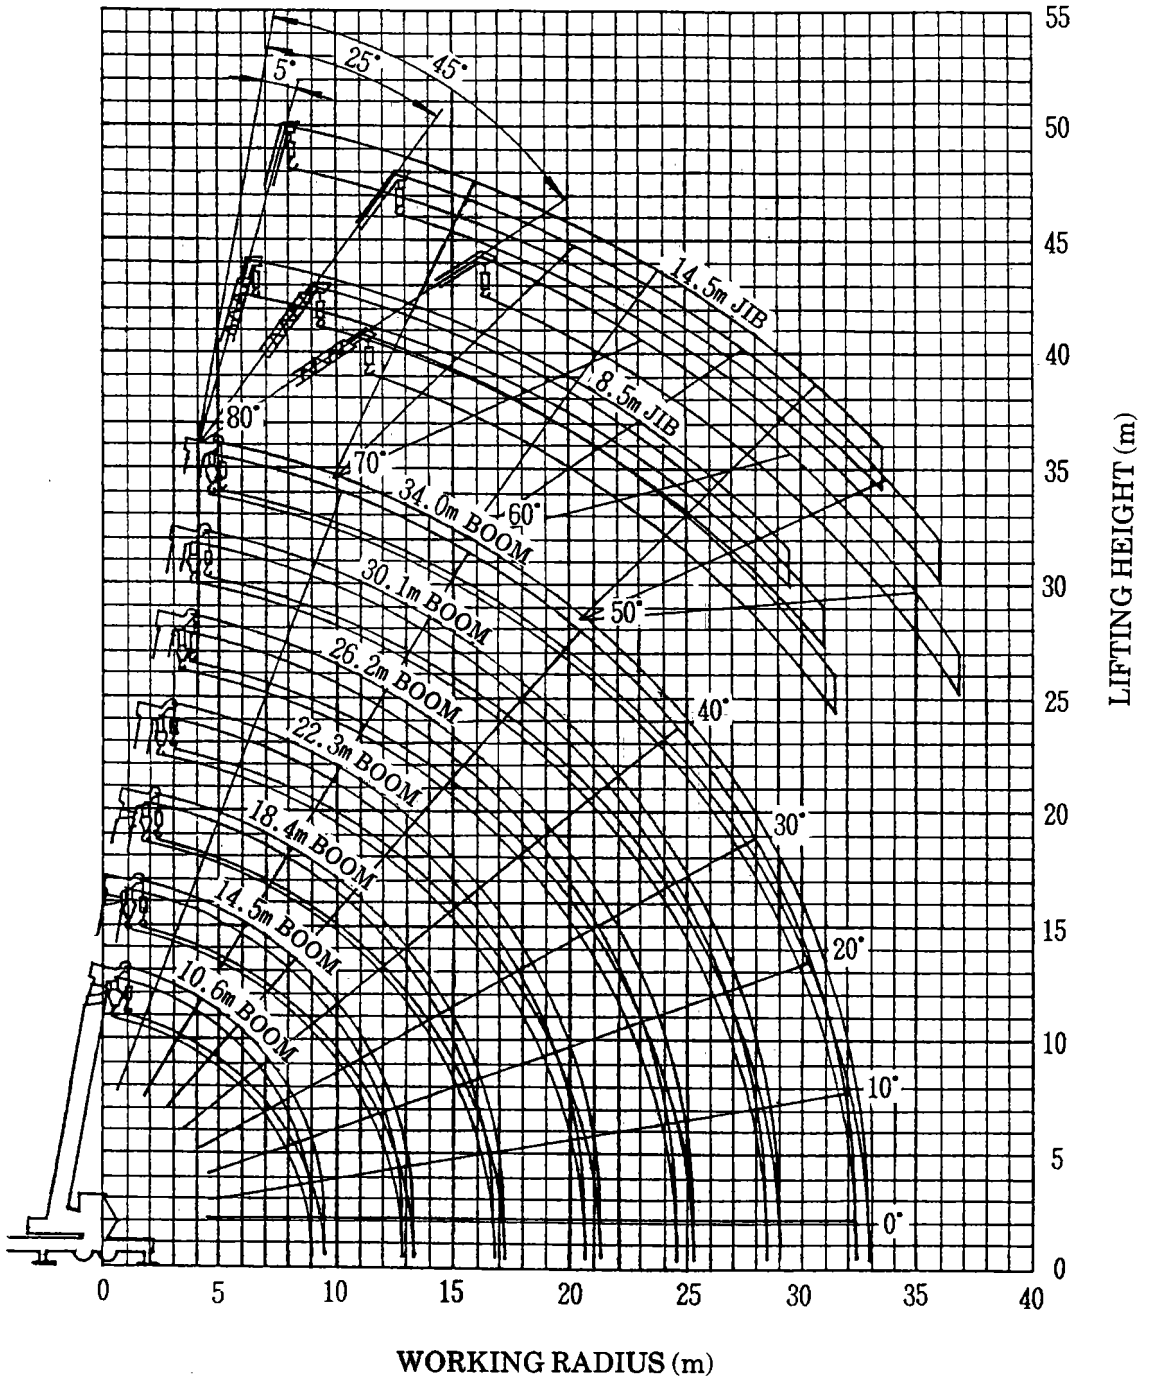

NOTES:


1. The deflection of the boom is not incorporated in the figure above.
2. The above chart is for the case where the outriggers are fully extended and where the front jack are used (over 360°).

DIMENSIONS (1/100)
P-KG455

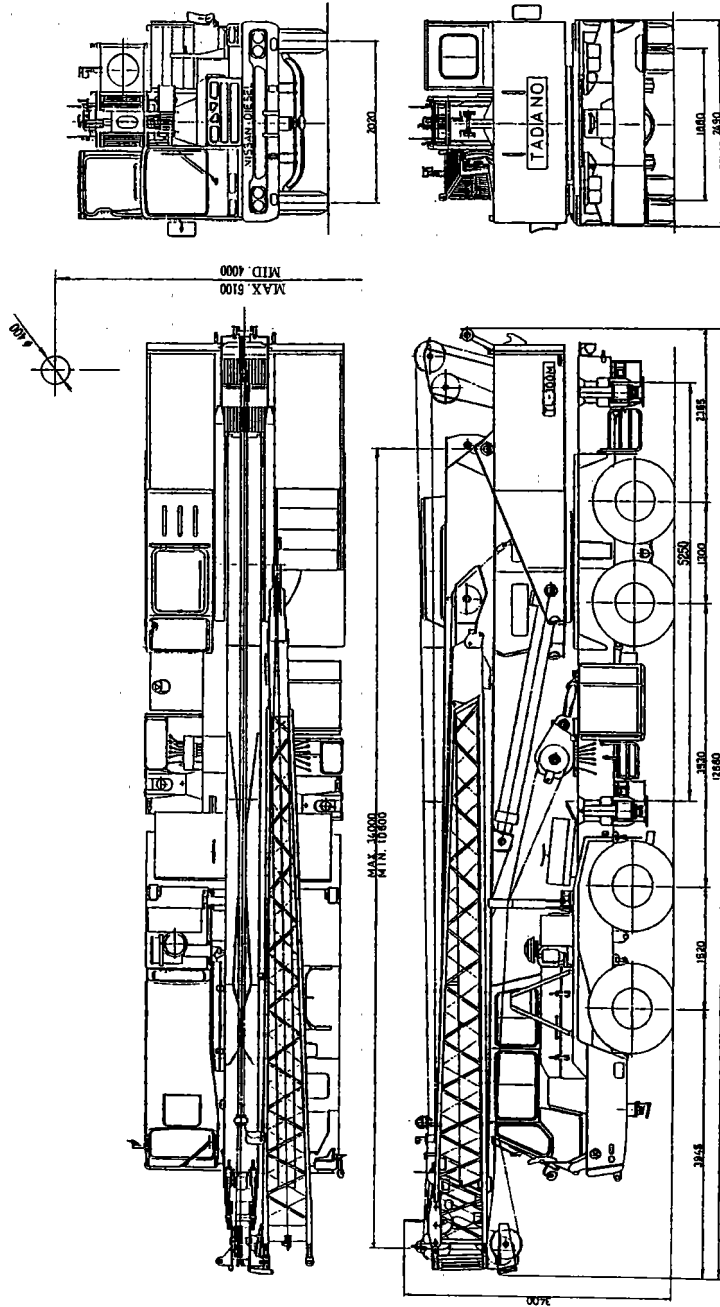

DIMENSIONS (1/100)

P-K303

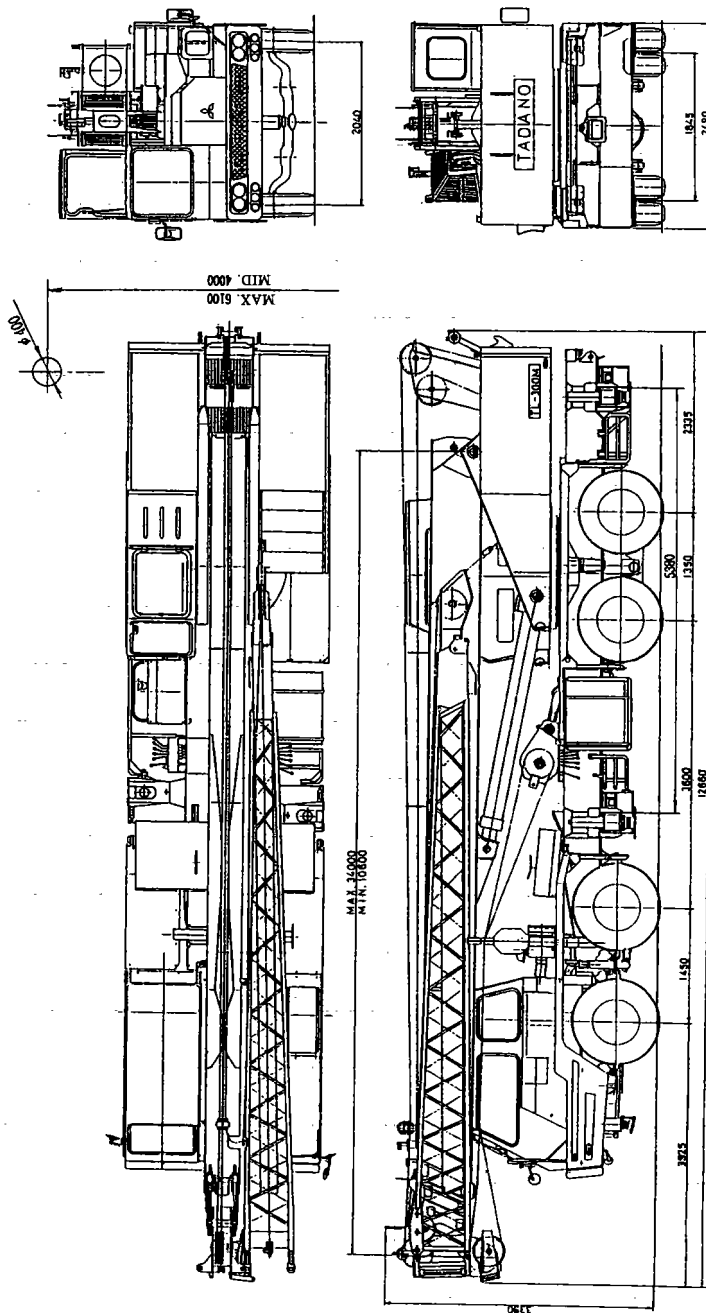

◆ MEMO ◆

A series of horizontal dashed lines for writing a memo.